

# UTILITY-SCALE ESS SOLUTION

DEYE WINTER WS SERIES



## Ultimate Safety

- 3+3 Fire Protection System
- 3+3 Electrical Safety Safeguards
- AC Leakage & DC Insulation detection
- High-Voltage Interlock



## Versatile Applications

- Peak Shaving & Energy Arbitrage
- Virtual Power Plant (VPP) Ready
- Off-Grid & Microgrid Capable
- PV and BESS DC Coupling
- Hybrid Solar-BESS-Diesel Systems



## High Energy Density

- 4300kWh in 20' BESS container
- 2250kW PCS, 3600kW PV in 10' container



## Seamless Scalability

- Modular Architecture
- Flexible 2/4/6h Energy Storage Solutions
- Compact Design, High Energy Density



## Smart Cloud Management

- AI-Powered Load Optimization
- 24/7 Remote Monitoring & O&M
- Real-Time Battery Health & Safety Alerts
- Cloud-Connected Ecosystem



## Cluster Management

- One cluster management, high availability, more friendly to the cell

**IP55**

Protection Rating

**3600kW**

PV DC Coupling


**10 Years**

Warranty


**5 Levels**

Fire Protection




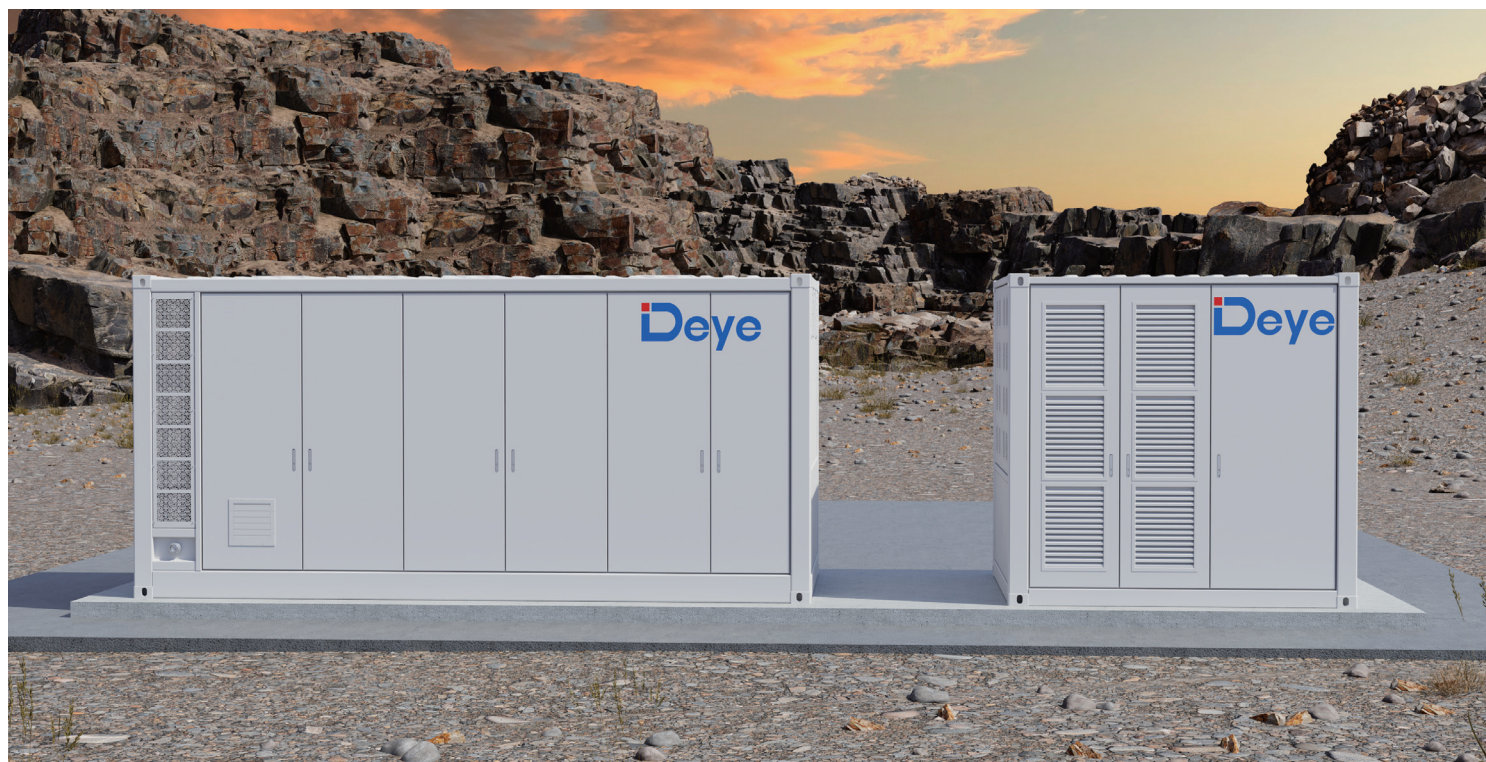


| Model                               |  | WS-L4300-2H3                |
|-------------------------------------|--|-----------------------------|
| <b>DC Battery</b>                   |  |                             |
| Battery Type                        |  | LiFePO <sub>4</sub>         |
| Nominal Capacity ( Cell )           |  | 314Ah                       |
| Nominal Energy                      |  | 4340kWh                     |
| PACK Configuration                  |  | 1P48S                       |
| RACK Configuration                  |  | 18 × 1P240S                 |
| Nominal DC Voltage                  |  | 768Vdc                      |
| DC Voltage Range                    |  | 648Vdc ~ 876Vdc             |
| Charge and discharge rate           |  | ≤0.5P                       |
| Max. Charging / Discharging Current |  | 3150A ( 18 × 175A )         |
| No. of DC Output                    |  | 18                          |
| <b>System</b>                       |  |                             |
| Operating Temperature               |  | -30°C ~ +55°C               |
| Storage Temperature                 |  | -30°C ~ +60°C               |
| Humidity                            |  | 0 ~ 95% ( No condensation ) |
| Type of cooling                     |  | Liquid cooling              |
| Fire Suppression                    |  | Aerosol、Water               |
| Ingress Protection                  |  | IP55                        |
| Anticorrosion grade                 |  | ≥C4                         |
| Altitude                            |  | ≤2000m                      |
| Communication                       |  | CAN、RS485、TCP、DIDO          |
| Weight                              |  | 40000kg                     |
| Dimensions ( W × D × H )            |  | 6058 × 2438 × 2896mm        |

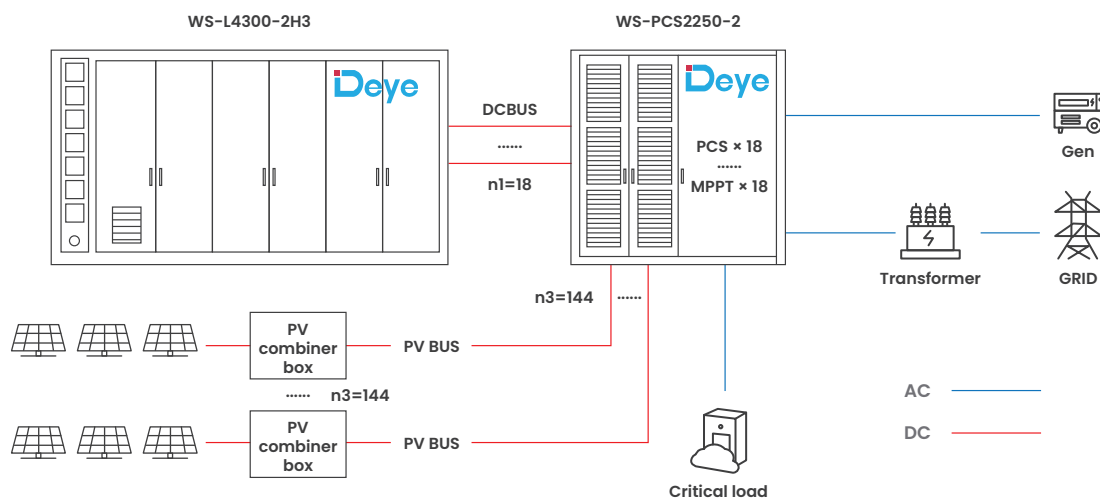
**UTILITY-SCALE ESS Solution**


### PV + Energy Storage + Diesel Generator Microgrid Solution

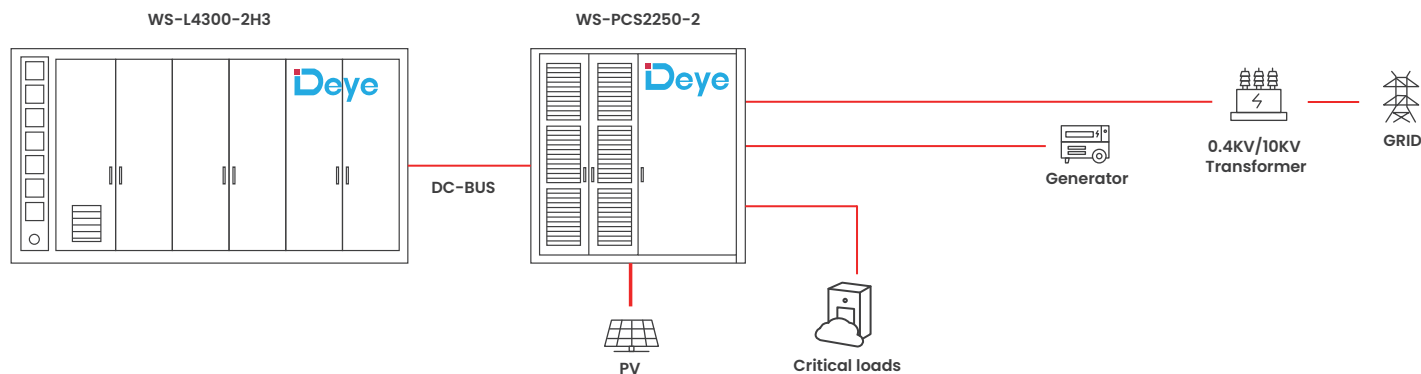


### PV+ Energy Storage + Diesel Generator off-grid Solution

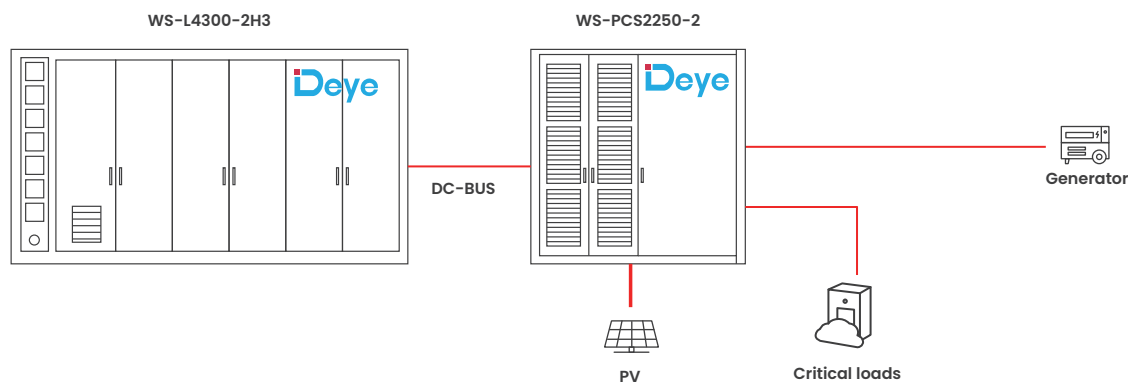


### PV + Energy Storage Off-grid Solution

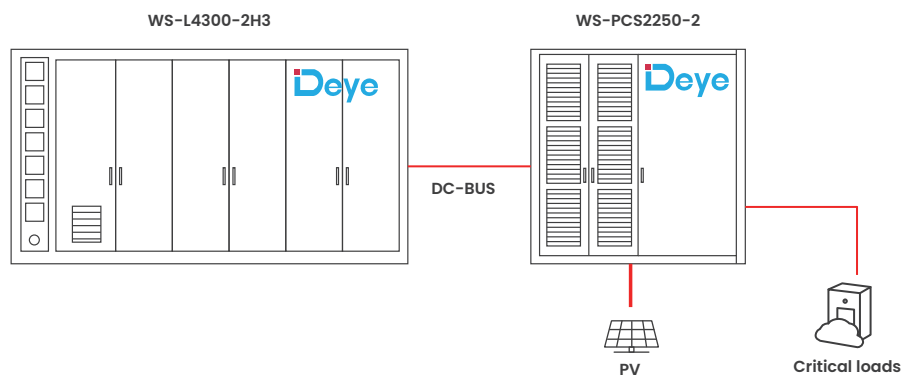


### On-grid Energy Storage Solution with Backup Power

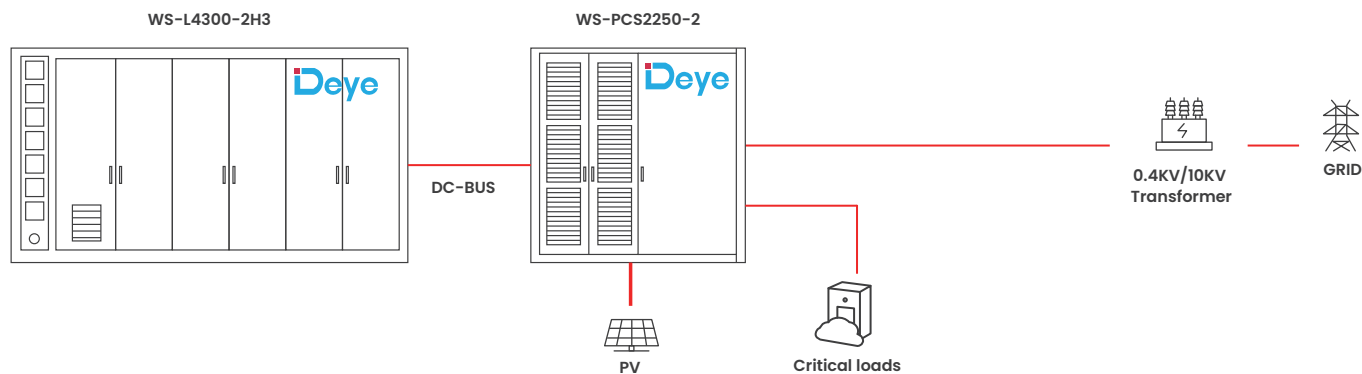


## Typical Application Scenarios

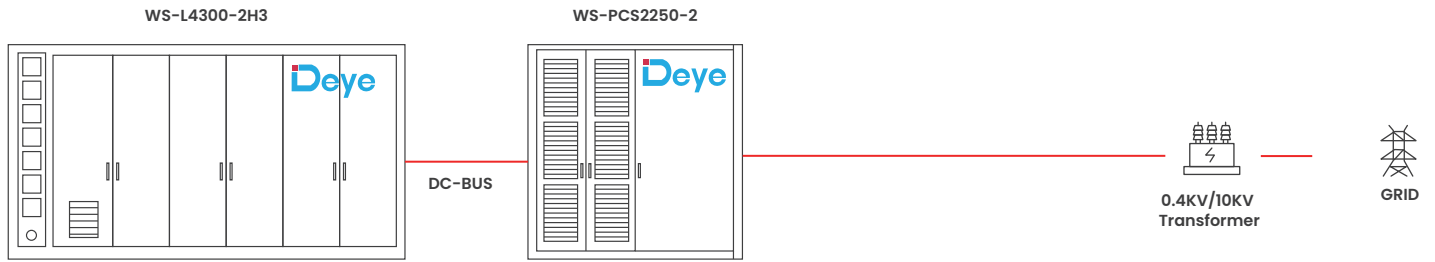


## 6-hour Energy Storage Solution

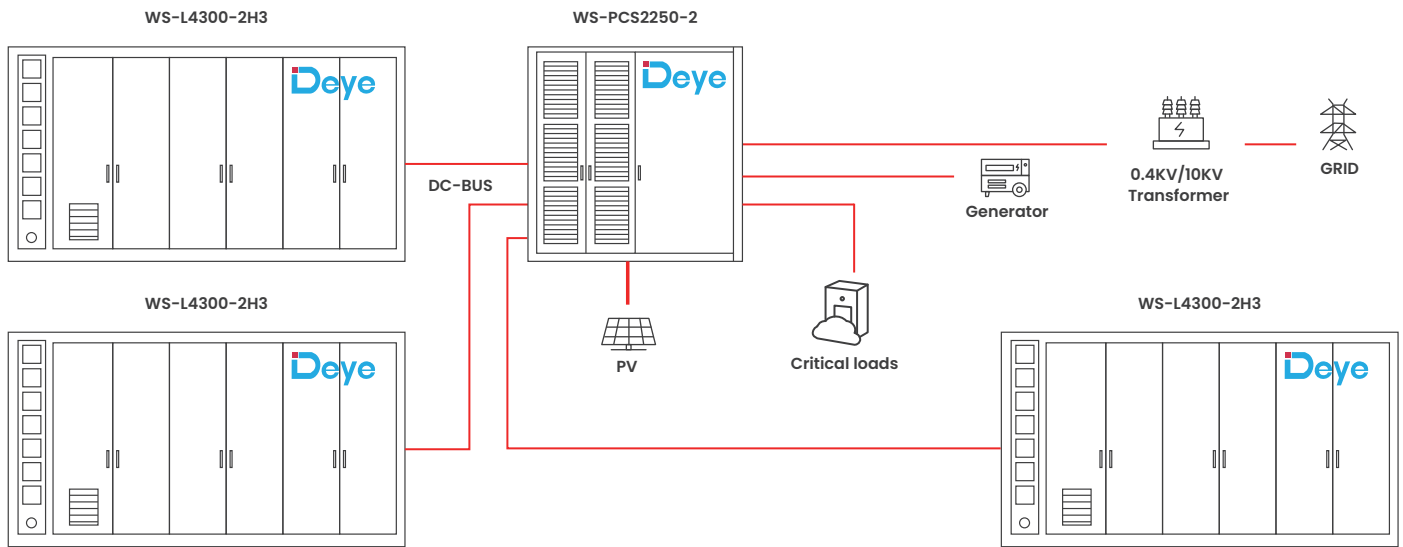

## 4-hour Energy Storage Solution

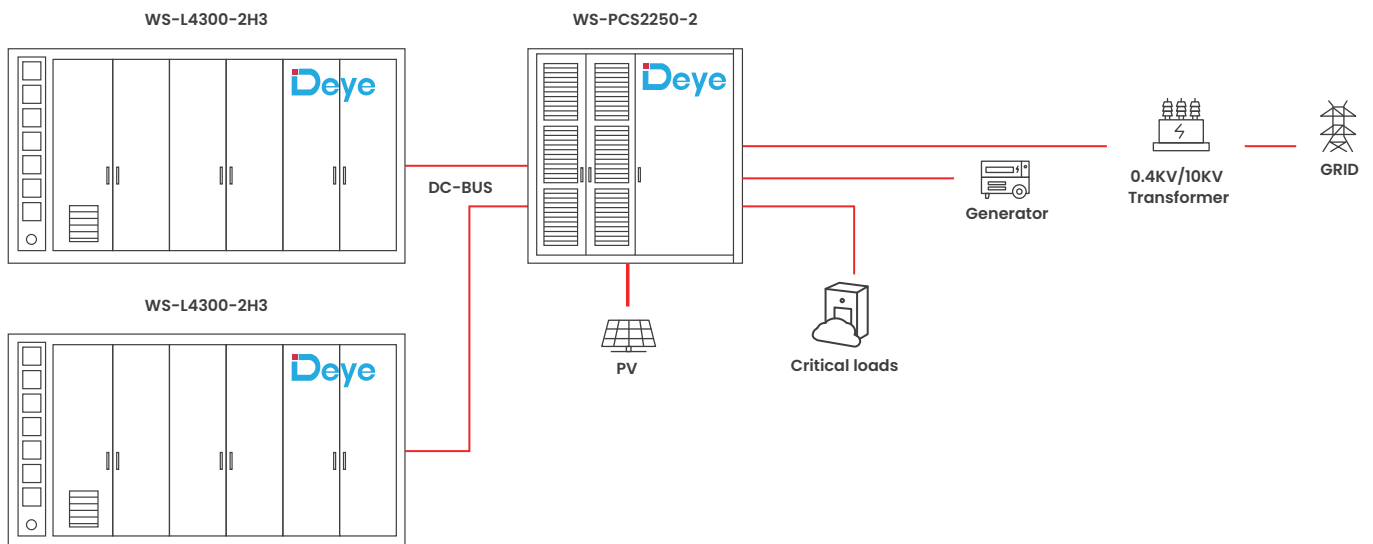


## 2-hour Energy Storage Solution

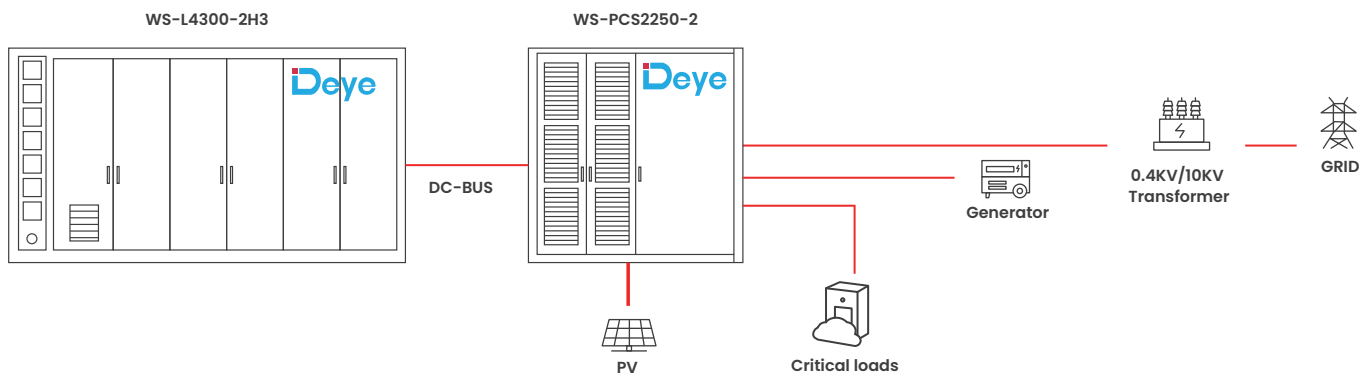


## Application Scenarios

Ideal for medium to large C&I microgrid applications


### 1. Applied in medium to large-scale C&I applications (Peak Shaving & Valley Filling)

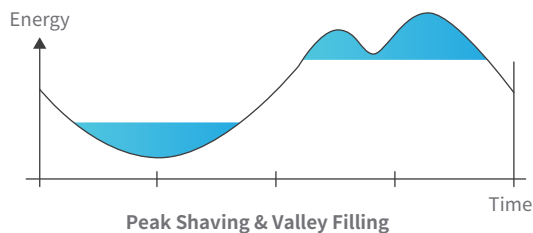


### 2. Integrated with renewable energy storage systems to smooth power output

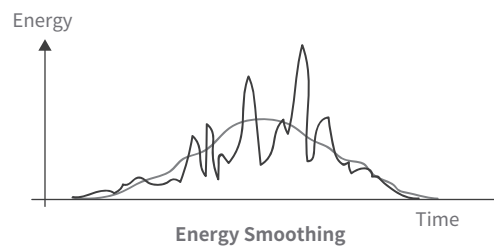

### 3. Used for Peak Shaving and Frequency Regulation on the power generation side

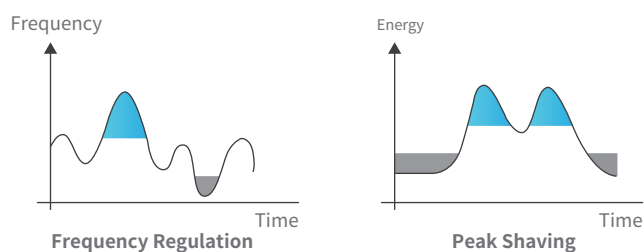

### 4. Participates in virtual power plants to provide ancillary power services (electricity trading)

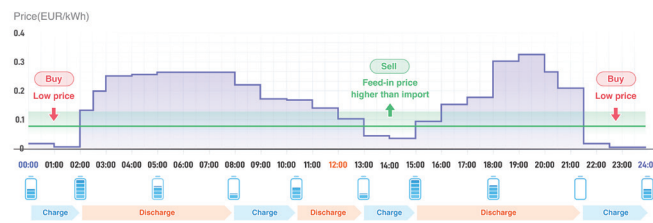

[www.deyeess.com](http://www.deyeess.com) / [www.deyeinverter.com](http://www.deyeinverter.com)



Deye ESS / Deye New Energy